

G-SERIES

GRADER BLADES FOR SKID STEER & COMPACT TRACK LOADERS

■ Medium Frame Machines (50hp - 75hp)

The world's first reversible grader blade range with hydraulic side wings




www.sharpgrade.com

SHARP GRADE®
Setting the Grade



No grease - All linkages are sealed for life

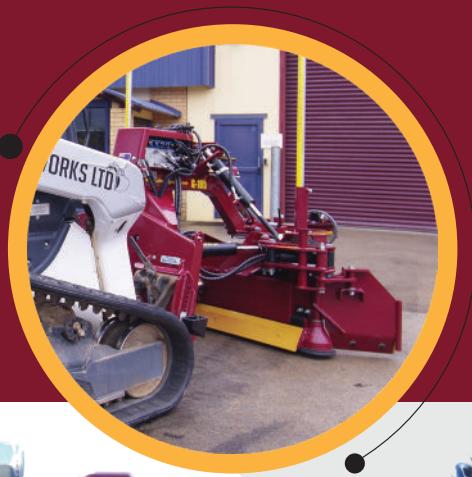


Why choose SharpGrade!

- Pivoting rear blade for precision grading in reverse
- No circle drive to grease or shim
- Accurate grading made easy - level to within 1/8" (3mm)
- Sealed, shielded and lifetime lubricated bearings throughout: Never requires greasing
- Patented QuadRod 3 linkage: keeps blade parallel throughout movement to maintain equal height between front & rear blade
- Retracting front chassis for road legal transport. Fit sideways across the deck of a truck or trailer, grade within 11" of foundations
- No centre pivot; 3 times faster to grade than conventional designs, no duck walking
- Adjustable Hitch plate: sets chassis level on lower stops for repeatable precision grading
- Underslung walking beam: reduces wheel scuff in turns
- Outboard mounted cylinders reduce cross coupling to a minimum
- Robust, narrow boxed chassis for unsurpassed visibility
- Angle cylinders are mounted above the material, for longevity
- Warranty period (12 months) includes commercial and rental usage



Large parabolic mirrors provide best in class visibility of the cutting edge

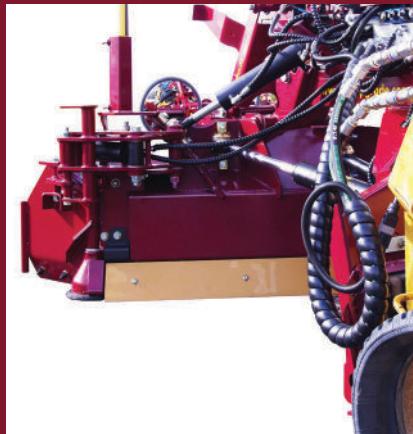

Rear blade to precision grade in reverse



Hydraulic wings control material in both directions



Retracting front chassis gets into corners

SPECIFICATIONS

	G105	G109
Front Retract	Manual	Hydraulic
QuadGrade 2D Laser Control Package	Optional	Optional
3D GPS or TPS Machine Control	Optional	Optional
Blade Width Articulated & Wings closed	62" / 1.58m	66" / 1.68m
Blade Width with Side Wings open	105" / 2.67m	109" / 2.77m
Blade Angle	+/- 30 degrees	+/- 30 degrees
Blade Tilt	+/- 10 degrees	+/- 10 degrees
Side Wing Angle	120 degrees total	120 degrees total
Weight	2,270 lb / 1,032 kg	2,700 lb / 1,228 kg
Horsepower Range	50 - 75hp (9,500lb / 4,300kg)	50 - 75hp (9,500lb / 4,300kg)
Maximum Hydraulic Pressure	3,625psi / 250 Bar	3,625psi / 250 Bar
Min / Max Flow Rate	12-40 GPM / 48-160 l/min	12-40 GPM / 48-160 l/min
Underslung Walking Beam	Standard	Standard
Adjustable Hitch Plate	Standard	Standard
Tires	Twin 18" x 7" / 468mm x 180mm	Twin 18" x 7" / 468mm x 180mm
Compatible with most 3D Control Systems	Yes	Yes

* Due to our commitment to continuous improvement specifications are subject to change without notice.



Transform your skidsteer loader into a precision grader blade

Get the performance of a larger grading machine right from the seat of your skidsteer loader and take advantage of your loader's inherent manoeuvrability to level ground with unparalleled ease and efficiency, forwards and backwards!

The G-105 and G-109 come with patented sealed, shielded and lifetime lubricated QuadRod linkages, adjustable hitch plate, pivoting rear blade, underslung walking beam and a retracting front chassis.

Built for hard work the G-105 and G-109 are suited to medium frame machines in the 50-75 HP bracket, ideal for medium stone and aggregate work, large flat work, road grading, curb & sidewalk prep, subdivisions etc, especially with 3D control.

- Adjustable height hitch plate
- Accurately level to within less than 1/8" (3mm)
- Grade forwards and backwards for maximum productivity
- QuadRod linkage joints are sealed, lubricated, and maintenance free
- Rear cross coupling design most rigid and accurate in class

 www.sharpgrade.com

SHARPGRADE, QUADROD, QUADGRADE & HARDILUBE®
are trademarks of Progressive IP Limited New Zealand
Copyright 2020-2021 Progressive IP Limited
NZ Patent No. 771572, 777227

SHARPGRADE®
Setting the Grade