

350V P

Excavator



JOHN DEERE



350 P-TIER EXCAVATOR



PUT MORE WORK WITHIN REACH

Whether you're loading trucks, digging trenches, demolishing structures, or placing pipe, a P-Tier Excavator can make easy work out of your toughest tasks. Customer-inspired upgrades include improved front-joint durability, a redesigned hood that boosts serviceability and cooler access, and up to seven-percent better fuel economy compared to the 350G LC model. A camera array with LED-surround lighting and flexible grade-management solutions — including fully integrated SmartGrade™ — are welcome options. Our machines deliver what you've come to expect in mid-size John Deere excavators, so you can count on doing more.



FEATURES



Rugged resistance

Tungsten-carbide thermal coating creates an extremely wear-resistant surface to protect the bucket-to-arm joint. Standard mainframe and optional track-frame undercovers add an extra layer of defense.

Control pattern

Designed to accommodate different operators with the simple flip of a lever, control pattern-change valve is standard instead of a field-kit option.

Performance plus

Powerwise Plus™ technology delivers fuel-efficient power when you need it.

Durable debris package

For work in environments with airborne debris, opt for our new debris package featuring an engine air centrifugal precleaner and a reversing electric variable-speed fan drive with selectable intervals and manual override.

Powerful productivity

Three productivity modes allow you to choose the digging style that fits the job: **High-productivity** delivers more power and faster hydraulic response to move more material. **Power** delivers a balance of power, speed, and fuel economy for normal operation. **Economy** helps save fuel.



UP TO 7%
BETTER FUEL
ECONOMY COMPARED
TO 350G LC



SET AUTO-IDLE
TO 800 RPM TO
SAVE FUEL

Seeing is believing

Optional camera array with LED-surround lighting integrated into the main monitor work together to supplement 270-degree visibility of the area around the machine.

Durable by design

Centralized lubrication at arm tip and improved front joint-bushing design relocate the grease-entry point to push contamination out from the center. New design simplifies routine greasing to boost joint life.

Cool connections

Larger hood opening and individually serviceable coolers improve overall access around the front of the engine. Four bolts and a single electrical connector make fan maintenance quick and easy.

Fuel saver

Electric, on-demand cooling fans ease engine load. In-line aftertreatment reduces system complexity and restriction. Larger front-piping diameter relieves hydraulic restriction, which combined lowers fuel consumption by up to seven percent compared to the 350G LC.

At home in the cab

Sculpted mechanical-suspension high-back seat slides independent of the pilot-control console. Optional premium air-suspension leather seat is adjustable and heated/cooled. Ergonomically correct short-throw pilot levers provide smooth fingertip control. Push buttons in the right lever finesse auxiliary hydraulic flow for operating attachments. Wide expanse of front and side glass, narrow front cab posts, large overhead window, and numerous mirrors provide clear visibility.



350 P-TIER EXCAVATOR



**GOGRADE.DEERE.COM
PROVIDES MOBILE-FRIENDLY
SETUP & OPERATION**

It's smart to get good grades

John Deere offers an economical way to adopt grade-management technology. Whether you're new to the game or want our most cutting-edge tech, there's a solution that will fit your needs. Choose 2D or 3D Excavator Grade Guidance or opt for fully integrated SmartGrade for 3D control including overdig protection and in-cab real-time distance to target. All grade-management solutions are factory ready and backed by your Deere dealer, including service, warranty, and financing.

Remote diagnostics and support

To maximize uptime and lower costs, JDLink™ connectivity provides machine location, utilization data, and alerts to help you maximize productivity and efficiency. JDLink also enables John Deere Connected Support™. Dealers use Expert Alerts based on data from thousands of connected machines to proactively address conditions that may otherwise likely lead to downtime. Your dealer can also monitor machine health and leverage remote diagnostics and programming capability to further diagnose problems and even update machine software without a time-consuming trip to the jobsite.*


*Availability varies by region. Options not available in every country.

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Engine	350 P-TIER		
Base engine for use in U.S., U.S. Territories, and Canada			
Manufacturer and Model	John Deere PowerTech™ PSS 9.0 L		
Non-Road Emission Standard	EPA Final Tier 4/EU Stage IV		
Net Rated Power (ISO 9249)	202 kW (271 hp) at 1,900 rpm		
Cylinders	6		
Displacement	9.0 L (549 cu. in.)		
Off-Level Capacity	70% (35 deg.)		
Aspiration	Series turbocharged, air-to-air charge-air cooler		
Cooling	Electric, on-demand cooling fans standard; reversing electric variable-speed fan drive with selectable intervals and manual override available as part of optional debris package		
Powertrain	2-speed propel with automatic shift		
Maximum Travel Speed			
Low	3.2 km/h (2.0 mph)		
High	5.0 km/h (3.1 mph)		
Drawbar Pull	30 350 kg (66,900 lb.)		
Hydraulics			
Open center, pilot controlled			
Main Pumps	2 variable-displacement pumps		
Maximum Rated Flow	288 L/m (76.1 gpm) x 2		
Pilot Pump	1 gear		
Maximum Rated Flow	30.2 L/m (8.0 gpm)		
Pressure Setting	3900 kPa (566 psi)		
System Operating Pressure			
Circuits			
Implement	34 300 kPa (4,975 psi)		
Travel	35 500 kPa (5,149 psi)		
Swing	33 300 kPa (4,830 psi)		
Power Boost	38 000 kPa (5,511 psi)		
Controls	Pilot levers, short stroke, low-effort hydraulic pilot controls with shutoff lever		
Cylinders			
	Bore	Rod Diameter	Stroke
Boom (2)	145 mm (5.7 in.)	100 mm (3.9 in.)	1520 mm (59.8 in.)
Arm (1)	170 mm (6.7 in.)	115 mm (4.5 in.)	1740 mm (68.5 in.)
Bucket (1)	140 mm (5.5 in.)	95 mm (3.7 in.)	1250 mm (49.2 in.)
Mass-Excavating (ME) Bucket (1)	145 mm (5.7 in.)	95 mm (3.7 in.)	1250 mm (49.2 in.)
Electrical			
Number of Batteries (12 volt)	2		
Battery Capacity	1,400 CCA		
Alternator Rating	300 amp		
Work Lights	2 halogen (1 mounted on boom, 1 on frame)		
Undercarriage			
Rollers (each side)			
Carrier	2		
Track	8		
Shoes, Triple Semi-Grousers (each side)	48		
Track			
Adjustment	Hydraulic		
Guides	3 per side		
Chain	Sealed and lubricated		

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.


Ground Pressure		350 P-TIER	
800-mm (32 in.) Triple Semi-Grouser Shoes	50.1 kPa (7.27 psi)		
Swing Mechanism			
Swing			
Speed	10.7 rpm		
Torque	120 000 Nm (88,500 lb.-ft.)		
Serviceability			
Refill Capacities		Refill Capacities (continued)	
Fuel Tank	628 L (166 gal.)	Hydraulic System	290 L (77 gal.)
Diesel Exhaust Fluid (DEF) Tank	35 L (9.3 gal.)	Swing Drive	11.8 L (12.5 qt.)
Cooling System	39.7 L (10.5 gal.)	Gearbox	
Engine Oil With Filter	27 L (7.2 gal.)	Propel (each)	8.5 L (9.0 qt.)
Hydraulic Tank	193 L (51 gal.)	Pump Drive	1.1 L (1.2 qt.)
Operating Weights			
With full fuel tank; 79-kg (175 lb.) operator; 1.76-m ³ (2.3 cu. yd.), 1372-mm (54 in.), 1532-kg (3,377 lb.) heavy-duty (HD) bucket; 4.0-m (13 ft. 1 in.) arm; 6928-kg (15,274 lb.) counterweight; and 800-mm (32 in.) triple semi-grouser shoes			
Operating Weight	36 734 kg (80,985 lb.)		
Component Weights			
Undercarriage With 800-mm (32 in.)	12 750 kg (28,100 lb.)		
Triple Semi-Grouser Shoes			
6.4-m (21 ft. 0 in.) One-Piece Boom (with arm cylinder)	3080 kg (6,790 lb.)		
Arm With Bucket Cylinder and Linkage			
3.2 m (10 ft. 6 in.)	1802 kg (3,973 lb.)		
4.0 m (13 ft. 1 in.)	1985 kg (4,376 lb.)		
Boom-Lift Cylinders (2), Total Weight	624 kg (1,376 lb.)		
1.76-m ³ (2.3 cu. yd.), 1372-mm (54 in.)	1532 kg (3,377 lb.)		
HD Bucket			
Counterweight, Standard	6928 kg (15,274 lb.)		
Operating Dimensions			
Arm Length		3.2 m (10 ft. 6 in.) / 6.4-m (21 ft. 0 in.) Boom Length	
Arm Digging Force		4.0 m (13 ft. 1 in.) / 6.4-m (21 ft. 0 in.) Boom Length	
SAE	177.0 kN (39,791 lb.)	152.6 kN (34,314 lb.)	
ISO	185.0 kN (41,590 lb.)	159.0 kN (35,745 lb.)	
Bucket Digging Force			
SAE	214.0 kN (48,109 lb.)	225.2 kN (50,628 lb.)	
ISO	246.0 kN (55,303 lb.)	246.0 kN (55,303 lb.)	
A Maximum Reach	11.10 m (36 ft. 5 in.)	11.86 m (38 ft. 11 in.)	
A' Maximum Reach at Ground Level	10.89 m (35 ft. 9 in.)	11.67 m (38 ft. 3 in.)	
B Maximum Digging Depth	7.38 m (24 ft. 3 in.)	8.18 m (26 ft. 10 in.)	
B' Maximum Digging Depth at 2.44-m (8 ft. 0 in.) Flat Bottom	7.21 m (23 ft. 8 in.)	8.04 m (26 ft. 5 in.)	
C Maximum Cutting Height	10.36 m (34 ft. 0 in.)	10.75 m (35 ft. 3 in.)	
D Maximum Dumping Height	7.24 m (23 ft. 9 in.)	7.63 m (25 ft. 0 in.)	
E Minimum Swing Radius	4.46 m (14 ft. 8 in.)	4.47 m (14 ft. 8 in.)	
F Maximum Vertical Wall	6.42 m (21 ft. 1 in.)	7.27 m (23 ft. 10 in.)	

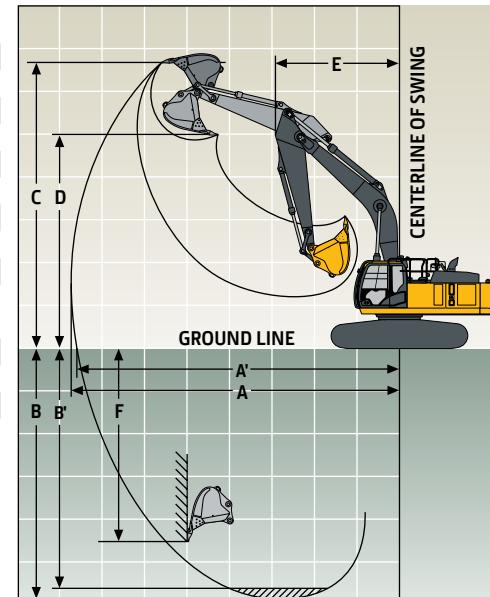

350 P-TIER

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Machine Dimensions	350 P-TIER	
Arm Length	3.2 m (10 ft. 6 in.) / 6.4-m (21 ft. 0 in.)	4.0 m (13 ft. 1 in.) / 6.4-m (21 ft. 0 in.)
A Overall Length	11.20 m (36 ft. 9 in.)	11.29 m (37 ft. 0 in.)
B Overall Height	3.27 m (10 ft. 9 in.)	3.60 m (11 ft. 10 in.)
C Rear-End Length/Swing Radius	3.60 m (11 ft. 10 in.)	3.60 m (11 ft. 10 in.)
D Distance Between Idler/Sprocket Centerline	4.05 m (13 ft. 3 in.)	4.05 m (13 ft. 3 in.)
E Undercarriage Length	4.94 m (16 ft. 2 in.)	4.94 m (16 ft. 2 in.)
F Counterweight Clearance	1.18 m (3 ft. 10 in.)	1.18 m (3 ft. 10 in.)
G Upperstructure Width	2.99 m (9 ft. 10 in.)	2.99 m (9 ft. 10 in.)
H Cab Height	3.14 m (10 ft. 4 in.)	3.14 m (10 ft. 4 in.)
I Track Width With Shoes	700 mm (28 in.) / 800 mm (32 in.)	700 mm (28 in.) / 800 mm (32 in.)
J Gauge Width	2.59 m (8 ft. 6 in.)	2.59 m (8 ft. 6 in.)
K Ground Clearance	0.50 m (20 in.)	0.50 m (20 in.)
L Overall Width With Shoes	700 mm (28 in.) 800 mm (32 in.)	3.29 m (10 ft. 10 in.) 3.39 m (11 ft. 2 in.)
		3.29 m (10 ft. 10 in.) 3.39 m (11 ft. 2 in.)

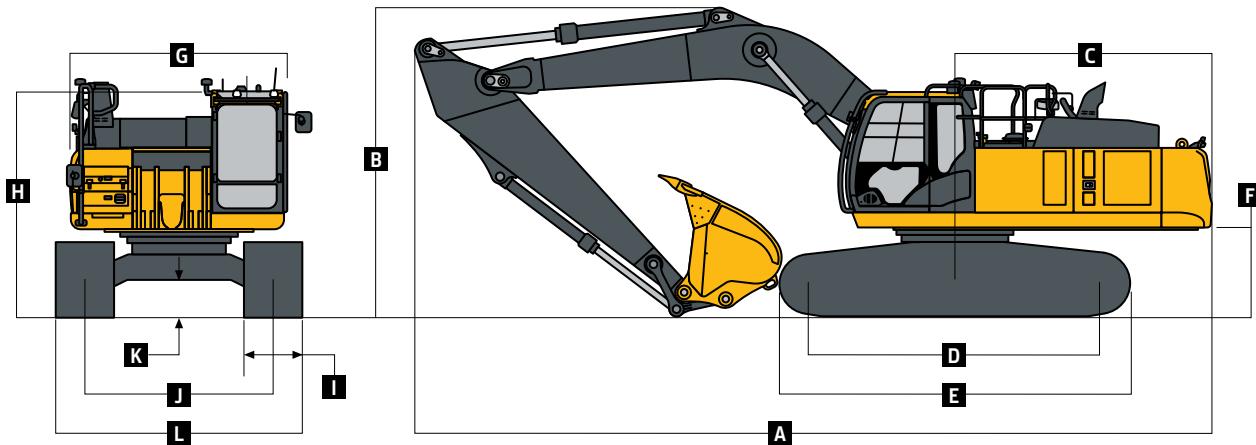

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

350 P-TIER

Lift Capacities

350 P-TIER

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

HORIZONTAL DISTANCE FROM CENTERLINE OF ROTATION

LOAD POINT HEIGHT	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 3.2-m (10 ft. 6 in.) arm and 6.4-m (21 ft. 0 in.) boom, less bucket</i>												
6.0 m (20 ft.)									9060	7400		
									(19,880)	(15,920)		
4.5 m (15 ft.)							11 070	10 060	9720	7180	7470	5380
							(24,000)	(21,730)	(21,180)	(15,490)		
3.0 m (10 ft.)			17 360	14 370	12 790	9520	10 590	6910	8140	5260		
			(37,340)	(31,050)	(27,680)	(20,560)	(23,030)	(14,910)	(17,540)	(11,340)		
1.5 m (5 ft.)			19 930	13 480	14 270	9040	10 480	6650	8010	5140		
			(43,040)	(29,090)	(30,910)	(19,530)	(22,590)	(14,360)	(17,250)	(11,080)		
Ground Line			20 710	13 110	14 350	8740	10 270	6460	7910	5050		
			(44,890)	(28,240)	(30,880)	(18,870)	(22,140)	(13,960)	(17,060)	(10,910)		
-1.5 m (-5 ft.)			13 320	13 320	20 180	13 040	14 210	8620	10 180	6380		
			(30,160)	(30,160)	(43,800)	(28,070)	(30,570)	(18,600)	(21,950)	(13,780)		
-3.0 m (-10 ft.)	15 640	15 640	21 080	21 080	18 540	13 160	14 130	8660	10 240	6440		
	(35,050)	(35,050)	(47,780)	(47,780)	(40,170)	(28,340)	(30,550)	(18,700)	(22,110)	(13,930)		
-4.5 m (-15 ft.)			20 300	20 300	15 380	13 480	11 590	8900				
			(43,680)	(43,680)	(33,030)	(29,070)	(24,610)	(19,260)				
<i>With 4.0-m (13 ft. 1 in.) arm and 6.4-m (21 ft. 0 in.) boom, less bucket</i>												
7.5 m (25 ft.)									(17,080)	(16,440)		
6.0 m (20 ft.)									8040	7350	6800	5,550
									(17,620)	(16,210)	(13,430)	(11,900)
4.5 m (15 ft.)									8800	7280	8230	5440
									(19,180)	(15,700)	(17,970)	(11,710)
3.0 m (10 ft.)					15 270	14 870	11 630	9700	9790	6970	8170	5280
					(32,860)	(32,100)	(25,170)	(20,930)	(21,290)	(15,040)	(17,600)	(11,370)
1.5 m (5 ft.)					18 500	13 740	13 370	9130	10 510	6660	7990	5110
					(39,940)	(29,660)	(28,960)	(19,720)	(22,640)	(14,380)	(17,210)	(11,020)
Ground Line			8060	8060	20 200	13 110	14 350	8730	10 230	6420	7840	4970
			(18,350)	(18,350)	(43,740)	(28,240)	(30,880)	(18,830)	(22,050)	(13,850)	(16,900)	(10,730)
-1.5 m (-5 ft.)	8110	8110	12 220	12 220	20 450	12 870	14 100	8510	10 070	6270	7760	4900
	(18,100)	(18,100)	(27,620)	(27,620)	(44,340)	(27,700)	(30,330)	(18,350)	(21,700)	(13,530)	(16,750)	(10,590)
-3.0 m (-10 ft.)	12 710	12 710	17 650	17 650	19 500	12 880	14 050	8460	10 040	6240		
	(28,470)	(28,470)	(39,970)	(39,970)	(42,260)	(27,730)	(30,230)	(18,260)	(21,650)	(13,490)		
-4.5 m (-15 ft.)	18 210	18 210	23 960	23 960	17 250	13 090	13 050	8590	9750	6390		
	(41,000)	(41,000)	(51,690)	(51,690)	(37,190)	(28,210)	(28,040)	(18,560)	(20,530)	(13,850)		
-6.0 m (-20 ft.)			17 360	17 360	12 870	12 870	9040	8990				
			(36,680)	(36,680)	(27,080)	(27,080)						


Buckets

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with John Deere TK-Series teeth. A variety of teeth are available through John Deere Parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Arm Dig Force, 3.2 m (10 ft. 6 in.)		Arm Dig Force, 4.0 m (13 ft. 1 in.)		Bucket Pin to Tooth Tip Radius	Number of Teeth	
	mm	in.	m ³	cu. yd.	kg	lb.	kN	lb.	kN	lb.	mm	in.	mm	in.	
Heavy Duty	915	36	1.04	1.37	1212	2,673	244.5	54,972	184.6	41,504	158.7	35,682	1671	65.8	4
	1067	42	1.27	1.66	1303	2,873	244.5	54,972	184.6	41,504	158.7	35,682	1671	65.8	4
	1220	48	1.50	1.96	1441	3,177	244.5	54,972	184.6	41,504	158.7	35,682	1671	65.8	5
	1372	54	1.74	2.27	1532	3,377	244.5	54,972	184.6	41,504	158.7	35,682	1671	65.8	6
Severe Duty	1372	54	1.74	2.27	1729	3,813	236.2	53,097	182.4	41,008	157.1	35,314	1730	68.1	5

Bucket Selection Guide*

350 P-TIER

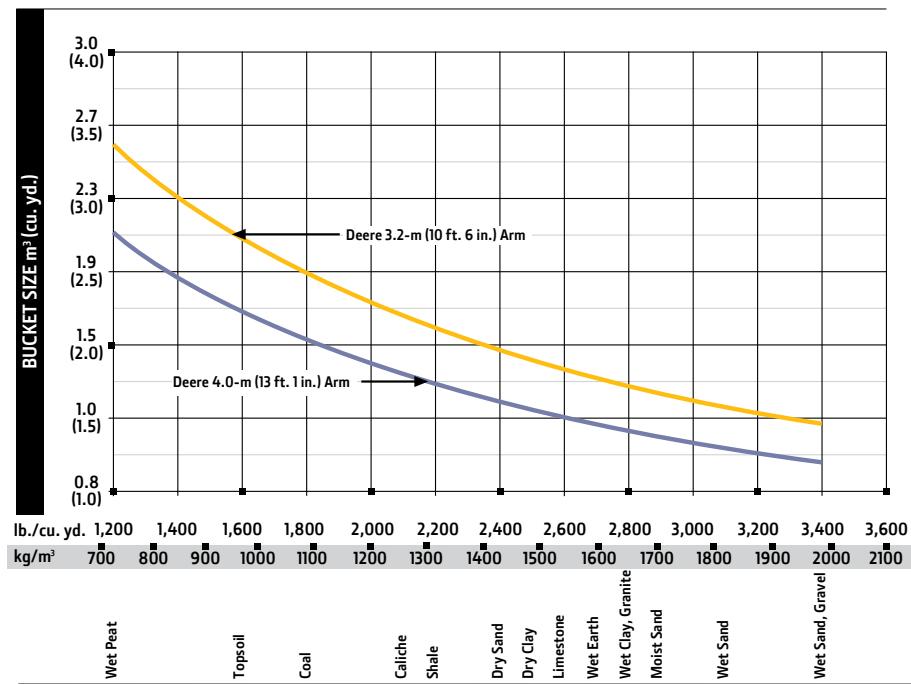

*Contact your John Deere dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

Additional equipment

Key: ● Standard ▲ Optional or special

See your John Deere dealer for further information.

350 P Engine

- Auto-idle system
- Automatic belt-tension device
- Batteries (2 – 12 volt)
- Coolant recovery tank
- Dual-element dry-type air filter
- Electronic engine control
- Enclosed fan guard (conforms to SAE J1308)
- Engine coolant to -37 deg. C (-34 deg. F)
- Programmable auto shutdown
- Fuel filter with water separator
- Fuel shutoff valve
- Full-flow oil filter
- Turbocharger with charge air cooler
- Electric, on-demand cooling fans
- 500-hour engine-oil-change interval
- 70% (35 deg.) off-level capability
- Engine-oil-sampling valve
- ▲ Chrome exhaust stack
- ▲ Electric ether starting aid

350 P Engine (continued)

- ▲ Reversing electric variable-speed fan drive with selectable intervals and manual override (available only as part of debris package)
- ▲ Engine coolant heater
- ▲ Engine air precleaner
- ▲ Severe-duty fuel filter
- Hydraulic System**
- Reduced-drift valve for boom down, arm in
- Auxiliary hydraulic valve section
- Spring-applied, hydraulically released automatic swing brake
- Auxiliary hydraulic-flow adjustments through monitor
- Auto power lift
- 5,000-hour hydraulic-oil-change interval
- Hydraulic-oil-sampling valve
- Control pattern-change valve
- Powerwise Plus™ hydraulic-management system

350 P Hydraulic System (continued)

- ▲ Auxiliary hydraulics with combination piping
- ▲ Auxiliary pilot and electric controls
- ▲ Hydraulic filter restriction indicator kit
- ▲ Load-lowering control / Anti-drift device
- ▲ Single-pedal propel control
- ▲ Dual pump-flow combiner
- ▲ High-flow auxiliary hydraulic lines with dual stop valves
- Undercarriage**
- Planetary drive with axial piston motors
- Propel motor shields
- Spring-applied, hydraulically released automatic propel brake
- Track guides, front idler and 3 additional
- 2-speed propel with automatic shift
- Upper carrier rollers (2)
- Sealed and lubricated track chain
- Heavy-duty undercover

Additional equipment (cont.)

Key: ● Standard ▲ Optional or special
See your John Deere dealer for further information.

350 P Undercarriage (continued)

- Triple semi-grouser shoes, 700 mm (28 in.)
- Single-bar shoes, 700-mm (28 in.) Heavy Duty (HD)
- Triple semi-grouser shoes, 800 mm (32 in.)
- ▲ Undercarriage frame opening guard

Upperstructure

- Right-hand and left-hand mirrors
- Vandal locks with ignition key: Cab door / Service doors / Toolbox
- Debris screen in side panel
- Remote-mounted engine oil and fuel filters

Front Attachments

- ▲ Hydraulic coupler ready
- Centralized lubrication system
- Dirt seals on all bucket pins
- Less boom and arm
- Oil-impregnated bushings
- Reinforced resin thrust plates
- Tungsten carbide thermal coating on arm-to-bucket joint
- ▲ Arm, 3.2 m (10 ft. 6 in.)
- ▲ Arm, 4.0 m (13 ft. 1 in.)
- ▲ Attachment quick-couplers
- ▲ Boom cylinder with plumbing to main-frame for less boom and arm
- ▲ Buckets: Heavy duty / Side cutters and teeth
- ▲ Material clamps

Operator's Station

- Adjustable independent-control positions (levers-to-seat, seat-to-pedals)
- AM/FM radio
- Auto climate control/air conditioner/heater/pressurizer
- Built-in Operator's Manual storage compartment and manual
- Cell-phone power outlet, 12 volt, 60 watt, 5 amp
- Coat hook
- Retractable seat belt, 76 mm (3 in.) (conforms to SAE J368)

350 P Operator's Station (continued)

- Floor mat
- Front windshield wiper with intermittent speeds
- Gauges (illuminated): Diesel Exhaust Fluid (DEF) / Engine coolant / Fuel
- Horn, electric
- Hourmeter, electric
- Hydraulic shutoff lever, all controls
- Hydraulic warm-up control
- Interior light
- Large cup holder
- Machine Information Center (MIC)
- Mode selectors (illuminated): Power modes (3) / Travel modes (2 with automatic shift) / Work mode (1)
- Multifunction, color LCD monitor with: Diagnostic capability / Multiple-language capabilities / Maintenance tracking / Clock / System monitoring with alarm features: Auto-idle indicator, engine air cleaner restriction indicator light, engine check, engine coolant temperature indicator light with audible alarm, engine oil pressure indicator light with audible alarm, low-alternator-charge indicator light, low-fuel indicator light, low DEF indication with audible alarm, fault code alert indicator, fuel-rate display, wiper-mode indicator, work-lights-on indicator, and work-mode indicator
- Motion alarm with cancel switch (conforms to SAE J994)
- Power-boost switch on right console lever
- Auxiliary hydraulic control switches in right console lever
- SAE 2-lever control pattern
- Tinted glass
- Transparent tinted overhead hatch
- Hot/cold beverage compartment
- USB charging port
- ▲ Hydraulic oil filter restriction indicator light
- ▲ Protection screens for cab front, rear, and side

350 P Operator's Station (continued)

- ▲ Window vandal-protection covers
- ▲ In-monitor adjustable flow and pressure auxiliary hydraulics with auxiliary function lever (AFL)

Factory-Integrated Grade Control

- ▲ 2D Guidance
- ▲ 3D Guidance
- ▲ SmartGrade™ Ready 2D control
- ▲ SmartGrade 3D control

Electrical

- 300-amp alternator
- Blade-type multi-fused circuits
- Positive-terminal battery covers
- JDLink™ wireless communication system (available in specific countries; see your dealer for details)
- ▲ Right rear left 270-deg. camera system with LED surround lighting
- Rearview camera
- ▲ Cab extension wiring harness

Lights

- LED work lights

Trim Packages

- **Level 1:** Mechanical seat and standard front LED worklights
- ▲ **Level 2:** Heated, air-suspension seat and standard front LED worklights
- ▲ **Level 3:** Heated, air-suspension seat, deluxe front LED worklights, and chrome exhaust
- ▲ **Level 4:** Premium-leather, thermal-heating, and active-cooling seat; deluxe front LED worklights; and chrome exhaust

Application Packages

- ▲ **Cold-weather package:** Engine-block heater and ether start aid
- ▲ **Debris package:** Engine air centrifugal precleaner, reversing electric variable-speed fan drive with selectable intervals and manual override (for use in airborne-debris environments)

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at test conditions specified per ISO 9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on a unit with 1372-mm (54 in.) heavy-duty (HD) bucket, 6928-kg (15,274 lb.) counterweight, 800-mm (32 in.) triple semi-grouser shoes, full fuel tank, and 79-kg (175 lb.) operator.



ME350PAU (22-06)



JOHN DEERE